



✱ O92 Model Shown

WARNING: Read these materials prior to assembling and using this trampoline and enclosure



Do not jump on trampoline when the all weather cover is installed.



Keep face clear of loaded trampoline and enclosure rods, particularly during assembly and disassembly.



Do not attempt to disassemble trampoline enclosure support rods from the rod joiner mechanism while the rods are installed in the trampoline and under tension.

1. Do not jump on trampoline when the all weather cover is installed. This may damage your trampoline or the cover and void the warranty of both products.
2. Before installing the cover, ensure that the FlexiNet™ enclosure has been correctly disassembled following the instructions contained in this manual.
3. It is recommended that two people are available to correctly install and remove the All Weather Cover from the trampoline.
4. Ensure the FlexiNet™ enclosure is carefully placed in the center of the trampoline mat. Ensure the enclosure rods are placed ON TOP of the FlexiNet™ enclosure so they do not come into direct contact with the trampoline mat.
5. In areas where snow falls and accumulates, regularly clear the snow from the All Weather Cover. Do not use a shovel to remove the snow from the trampoline, because it may damage the All-Weather Cover or FlexiNet™ enclosure net. The most effective tool is a soft bristle broom. Reach onto the center of the mat and pull the snow load to the edge of the cover and sweep off.
6. Careful cleaning of the All Weather Cover is recommended before packing it away, ensuring it is completely dry.
7. Do not use harsh chemicals, or abrasive cleaning implements or brushes to clean the All Weather Cover. To do so may cause damage to the materials and void your warranty.
8. Before using the trampoline, remove cover and install FlexiNet™ enclosure net and enclosure rods following the instructions contained in this manual.

Trampoline and Enclosure Installation and Placement Instructions

1. Adequate overhead clearance is essential. A minimum of 24 ft (7.32 m) from ground level is recommended. Provide clearance for wires, tree limbs, and other possible hazards.
2. Lateral clearance is essential. A minimum of 4 ft (1.22 m) clearance around the perimeter of the trampoline must be maintained at all times. Place the trampoline/enclosure away from walls, structures, fences, and other play areas. Maintain a clear space on all sides of the trampoline/enclosure.
3. Place the trampoline/enclosure on a level surface before use.
4. Use the trampoline/enclosure in a well-lit area. Artificial illumination may be required for indoor or shady areas.
5. Secure the trampoline/enclosure against unauthorized and unsupervised use.
6. Remove any obstructions from beneath the trampoline/enclosure.
7. Do not attempt to use the trampoline/enclosure until it is completely assembled.
8. The owner and supervisors of the trampoline/enclosure are responsible for ensuring all users are aware of practices specified in the use instructions.
9. The trampoline enclosure is only to be used as an enclosure for a trampoline and the trampoline must be of the appropriate size as covered by the specific enclosure.

Care and Maintenance Instructions

Inspect the trampoline/enclosure before each use and replace any worn, defective, or missing parts. The following conditions could represent potential hazards:

1. Punctures, frays, tears, or holes worn in the bed, mat edge system, or net.
2. Deterioration in the stitching or fabric of the bed, mat edge system, or net.
3. Broken, missing, or splintered trampoline rods, or rods disconnected from the mat edge.
4. A sagging bed, or a loose enclosure net; improperly or insecurely attached bed or enclosure net.
5. Rods not fully inserted into sockets or ball joints not fully engaged in mat edge.
6. Deteriorated, missing or damaged plastic edge fittings (If the plastic edge fittings have deteriorated or are damaged, rods may release and cause injury. Inspect regularly, but keep face well clear in the process. Replace damaged components).
7. Enclosure rods and attachment fittings are missing, broken or improperly assembled.
8. Enclosure rods not fully up into the net pockets.
9. Missing C-clips from the sockets on the frame.
10. A bent or broken frame, or sharp protrusions on the frame.

The soft edge of the Springfree™ trampoline is designed to reduce injury. It is not designed to cope with deliberate, continuous, vigorous bouncing activity. Do not deliberately bounce around the edge.

INSTALLING THE ALL WEATHER COVER (S113 MODEL SHOWN)

Step 1: Taking down the Flexi-Net™ enclosure

First, remove the C-clips at the bottom of the enclosure rods, then lift the bottom of the enclosure rods out of their sockets in the frame. Once the net is slack, pull the rods from the pockets at the top of the net. The net will then be lying around the trampoline.

Step 2: Positioning the net and enclosure rods

Gently lay the FlexiNet™ enclosure net onto the mat of the trampoline. Then lay the enclosure rods ON TOP of the net so they do not come into direct contact with the trampoline mat. Ensure the net and enclosure rods are placed in the center of the trampoline mat.

Step 3: Preparing the all weather cover

Note: the use of 2 people is recommended.
Remove the All Weather cover from its packaging and lay flat on the ground beside trampoline with the SPRINGFREE logo facing up.

TO FOLD THE ENCLOSURE ROD

1. Remove the enclosure rod assembly from the enclosure rod socket in the base of the trampoline.
2. Remove the rod assembly from the rod pocket at the top of the net.
3. Slide the white joiner up and fold the enclosure rods.

WARNING: Never attempt to remove an enclosure rod from its pocket or disengage (unlock) the joiner while the enclosure rod is under tension.



Step 4: Positioning the cover

With one person standing on each side, gently lift and position the cover over the trampoline mat surface as shown. Working from opposite sides, pull the elasticised edge down over the edge of the mat until it completely covers the mat and mat rods.



Step 5: Fitting the cover over the mat

Continue working around opposite sides of the trampoline until the entire mat is covered.

Be sure to affix the straps of the All Weather Cover to the frame or rods to secure the cover in severe weather.



Congratulations! You have successfully completed the installation of your Springfree™ All Weather Cover!

WARNING: do not jump on trampoline when the All Weather Cover is installed. This may damage your trampoline or All Weather Cover and void the warranty of both products.



REMOVING THE ALL WEATHER COVER AND REINSTALLING THE FLEXINET™ ENCLOSURE (S113 MODEL SHOWN)

Note: the use of 2 people is recommended.

Before using the trampoline:

1. Remove cover and install FlexiNet™ enclosure net and enclosure rods as per the instructions in the installation manual.
2. Ensure the area under the trampoline is clear of all obstructions.
3. Reacquaint yourself with all trampoline safety information.

We recommend cleaning the All Weather Cover before packing it away. A soft bristle brush with gentle dishwashing detergent (diluted in cold water) should be adequate to remove any dirt, debris, and stains. Hose off and allow to completely dry before removing the cover for storage. A cover that is not completely dry may attract mould during storage, so it's important to ensure the cover is completely dry before storing away. Do not use stiff bristle brushes, or harsh cleaners or chemicals or this may damage the cover fabric and void your warranty.

Step 1: Removing the All Weather Cover

Working from opposite sides, pull the elasticised edge up onto the mat of the Springfree, until it is free and sitting over the mat's surface.



Step 2: Preparing the cover for storage

Working on opposite sides, lift the cover onto the ground beside the Springfree (in you have insufficient room in your yard for this, you can skip this step and fold the cover directly from the top of your trampoline).



Step 3: Repacking the cover



Gently fold the cover in half – starting from one side, and pulling over to the other. Fold the curved edge in towards the center as shown.

Fold each edge to the center, and fold again so you are left with a square with the elasticised edge completely secure and folded inside.



Step 4: Assembling the enclosure rods


Straighten the enclosure rods and slide the white joiner down to secure the two rods together.

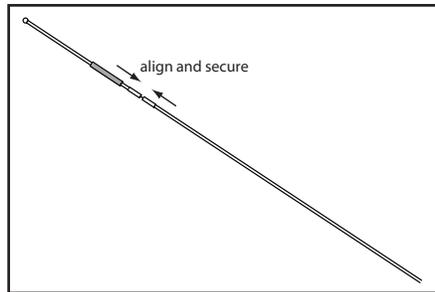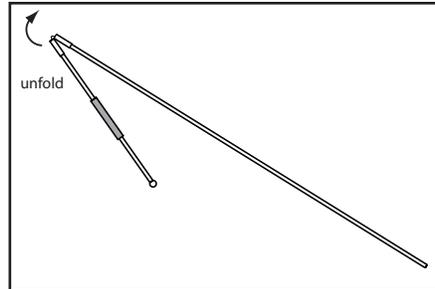

Step 5: Inserting the first enclosure rod


Insert the ball end of the rod up through the loop and into a pocket in the top edge of the net.

Ensure the rod is pushed right to the end of the pocket. Unless you do this, the internal catch cannot prevent the rod from coming out during use. Next, hoist the net up.

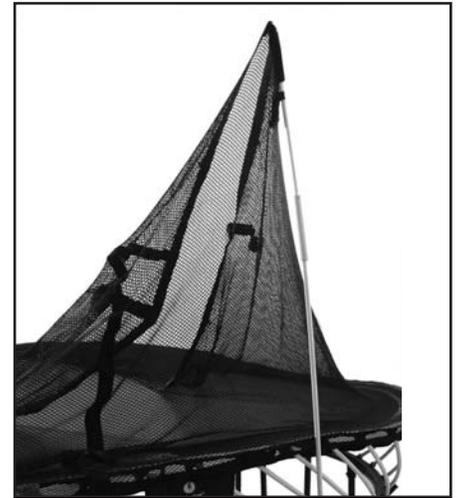

Step 6: Bending the enclosure rod into its socket

Bend the rod and insert the bottom end into the socket on the frame. Ensure that the rod is pushed right down into its socket and locked in place by the C-clip. Next, insert the enclosure rod on the opposite side of the trampoline.

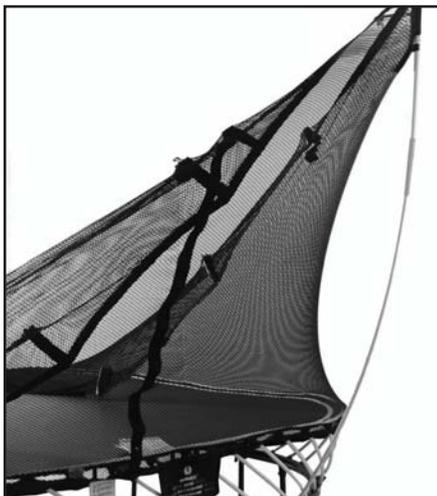

Step 7: Completing the enclosure

Insert remaining enclosure support rods by the same process as in Step 11.

Ensure the joiner-lock is engaged, holding the short and long pieces of the enclosure rod. Also, ensure that the rod is pushed right down into its socket and locked in place by the C-clip.


Again, ensure rods are pushed right to the ends of the pockets so the internal catches will prevent them from coming out.



Step 8: Checking C-clips are secure in sockets

C-clips should be pre-installed onto the sockets. Check and ensure the 12 C-clips are on the sockets. Ensure these clips capture the rods and prevent them from being pulled out.

Congratulations! You have successfully completed the re-assembly of your Springfree™ Trampoline! Be sure to re-view all warnings and precautions with your family before using again.

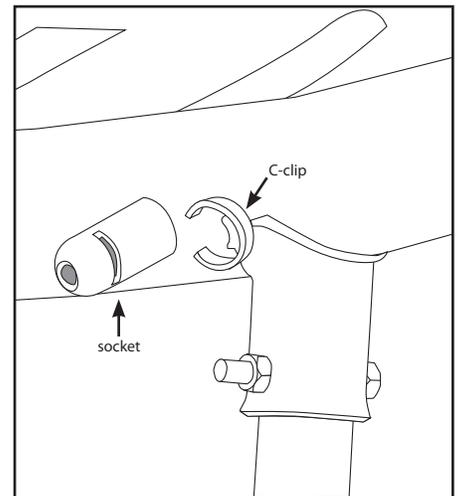

SPRINGFREE™ TRAMPOLINE WORLDWIDE AUTHORIZED SERVICE CONTACTS

NORTH AMERICA

Springfree Trampoline Inc.
151 Whitehall Drive, Unit 2
Markham, Ontario L3R 9T1
Canada

Toll free: 1 877 JUMP SAFE
Fax: 1-905-948-0016

Email: customerservice@springfree.com
Web: www.springfree.com

AUSTRALIA

Springfree Trampoline Aust Pty. Ltd.
Unit 1, 60 Hoopers Road
Kunda Park
Queensland, 4556
Australia

Free: 1800 JUMP SAFE
1800 123 204
Fax: +61-7-5453-9444

Email: fun@springfree.com.au
Web: www.springfree.com.au

NEW ZEALAND

Springfree New Zealand Ltd.
125 Blenheim Road, P.O. Box 80117
Riccarton, 8440
Christchurch, New Zealand

Free: 0800 JUMPSAFE
0800 586 772
Ph: +64-3-961-0529
Fax: +64-3-963-6999

Email: info@springfree.co.nz
Web: www.springfree.co.nz

If you require service on a Springfree™
Trampoline product and your territory is not
included in this list, then contact us via one of
our registered e-mail addresses above.